

## IP-Enabled Wall-Mounted Indoor Speaker

DW-SWSPW30iAM




### WHAT'S IN THE BOX

IP Wall Mounted Speaker		1	Quick Setup Guide		1
Waterproof Cap		1			

**NOTE:** Mounting fasteners are not included. Use M8 fasteners or screws with an outer diameter of 5/16" or smaller.

Download all your support materials and tools in one place.

1. Go to: <http://www.digital-watchdog.com/resources>
2. Search your product by the part number. Results will populate automatically based on the part number you enter.



## INSTALLATION

**NOTE:** The speaker should be on the same network as the DW Spectrum Mediaserver.

- 1 Mark and drill the holes in the mounting surface using the speaker's mounting bracket.
- 2 Pass wires through and make all the necessary connections. Connect to the camera's network. Use the waterproof cap for an added layer of protection from moisture. See the diagram on the right for installation.

**NOTE:** The speaker can be powered by PoE or 12V DC. Both power sources CANNOT be used at the same time.



- 3 Secure the speaker to the mounting surface.

**NOTE:** Mounting fasteners not included. Use M8 fasteners or screws with outer diameter that is 5/16" or smaller.

- 4 Complete the speaker's setup using the speaker's web interface. Open a web browser and enter the speaker's IP address.

**NOTE:**  
 Default IP address: 192.168.1.50.  
 Default username: admin  
 Default password: admin  
 (password must be changed during the initial installation)

- 5 Change the IP address to the same subnet range of the cameras.

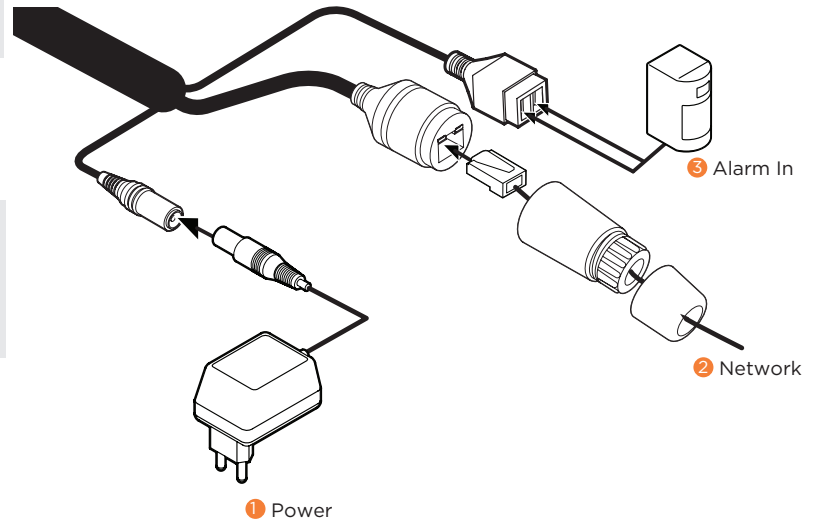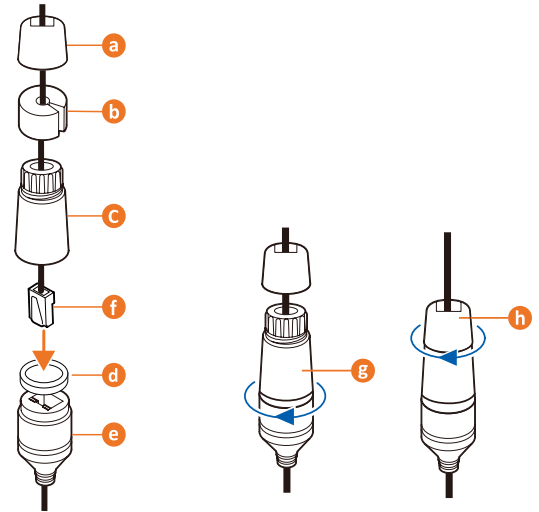

## ADDING TO DW SPECTRUM

- 1 Open the DW Spectrum client.
- 2 DW-SWSPW30iAM should be listed under the resource tree if auto-discovery is enabled and the DW Spectrum Mediaserver and the speaker are on the same network.  
 \* Add the speaker manually if the auto-discovery is disabled.

## DIMENSIONS

